


## Low Capacitance ESD TVS Array in SOT-23

### Features

- 350Watts peak pulse power ( $t_p = 8/20\mu s$ )
- Tiny SOT-23 package
- Unidirectional configurations
- Protects one I/O port
- Low clamping voltage
- Low Leakage current
- ESD-immunity acc. IEC 61000-4-2  $\pm 30kV$  contact  $\pm 30kV$  air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 22A (8/20 $\mu s$ )

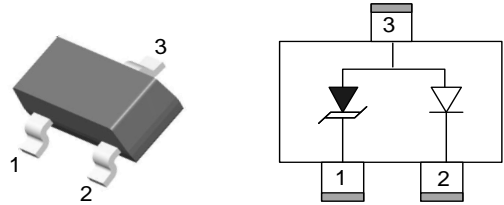

### Mechanical Data

- **Case:** SOT-23 (plastic package).  
Lead free; RoHS compliant
- **Molding Compound Flammability Rating:**  
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:  
260 °C/10 sec. at terminals

### Applications

- Dataline
- Automatic Teller Machines
- Net works
- Power line

### Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified


Parameter	Symbol	Value	Unit
ESD Air Discharge per IEC 61000-4-2	$V_{ESD}$	$\pm 30$	kV
ESD Contact Discharge per IEC 61000-4-2	$V_{ESD}$	$\pm 30$	kV
Peak pulse power 8/20 $\mu s$ waveform	$P_{PPM}$	350	W
Peak pulse current 8/20 $\mu s$ waveform	$I_{PPM}$	22	A
Operating Temperature	$T_J$	- 55 to + 125	°C
Storage Temperature	$T_{STG}$	- 55 to + 150	°C

### Electrical Characteristics


( $T_A = 25$  °C unless otherwise specified)

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage		$V_{RWM}$			2.8	V
Reverse current	at $V_R = 15$ V	$I_R$			0.5	$\mu A$
Clamping voltage	at $I_{PP} = 1$ A, Acc. IEC 61000-4-5	$V_C$			6	V
Clamping voltage	at $I_{PP} = 22$ A, Acc. IEC 61000-4-5	$V_C$			15	V
Reverse Breakdown Voltage	at $I_R = 1$ mA	$V_{BR}$	3.5			V
Capacitance	at $V_R = 0$ V ; $f = 1$ MHz	$C_D$		0.5		pF


## Typical Characteristics ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

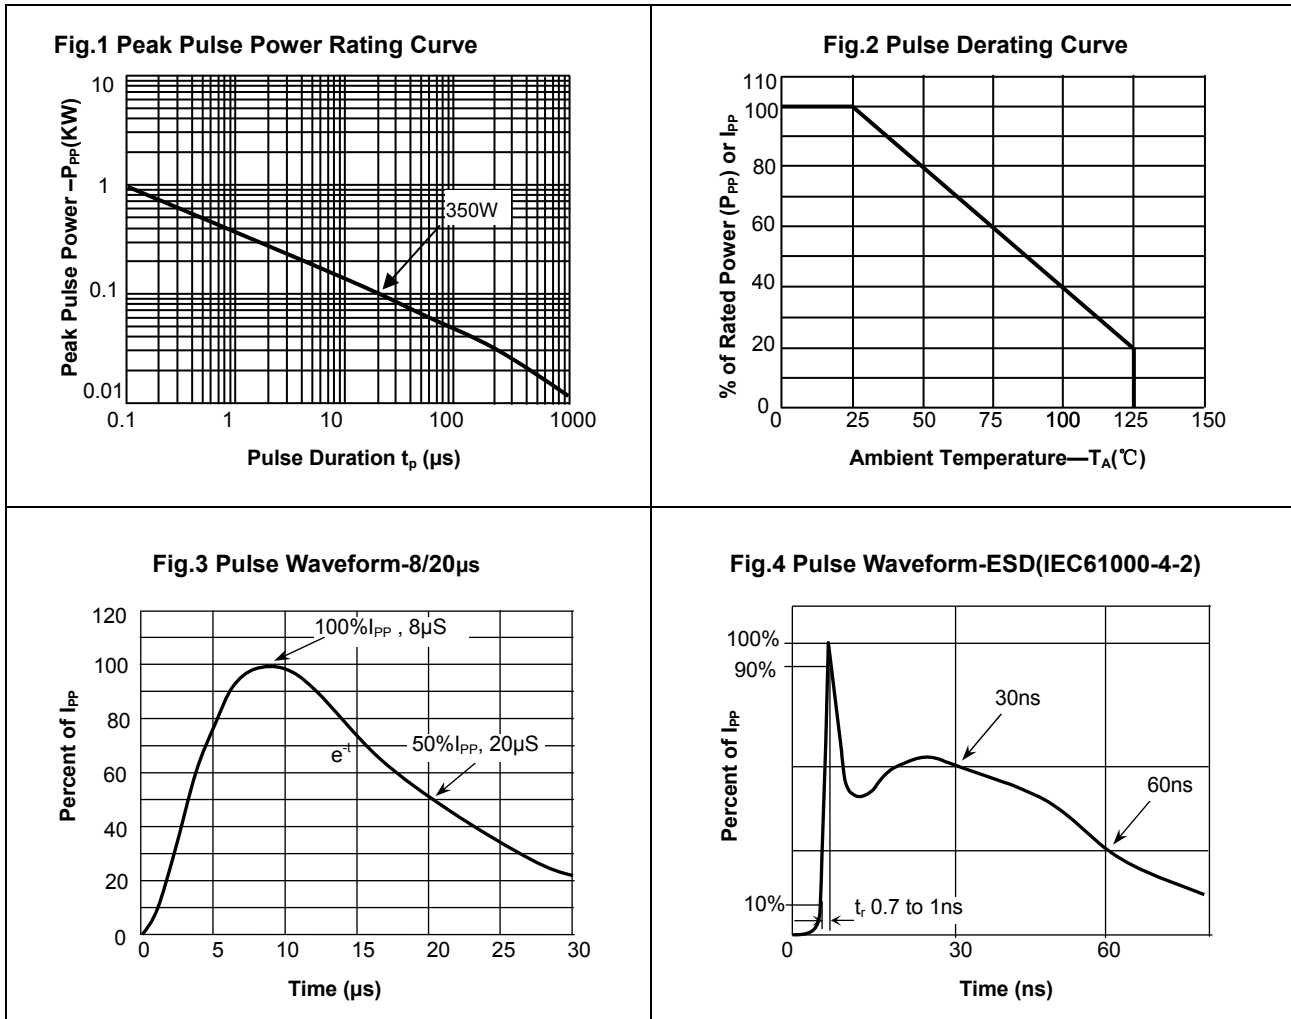


## Package Dimensions

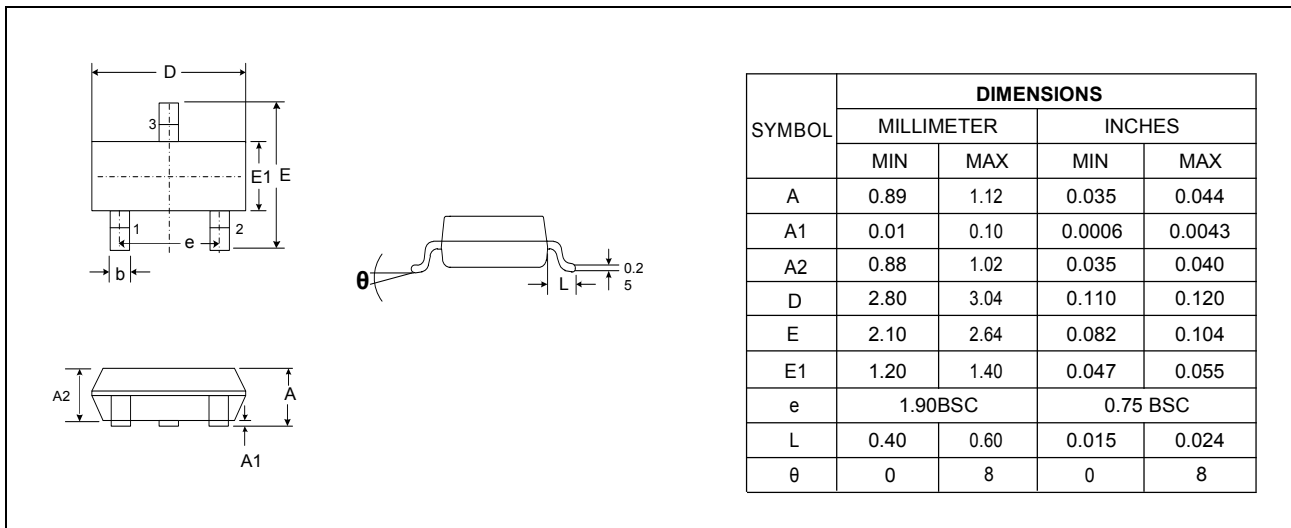

## Part number system

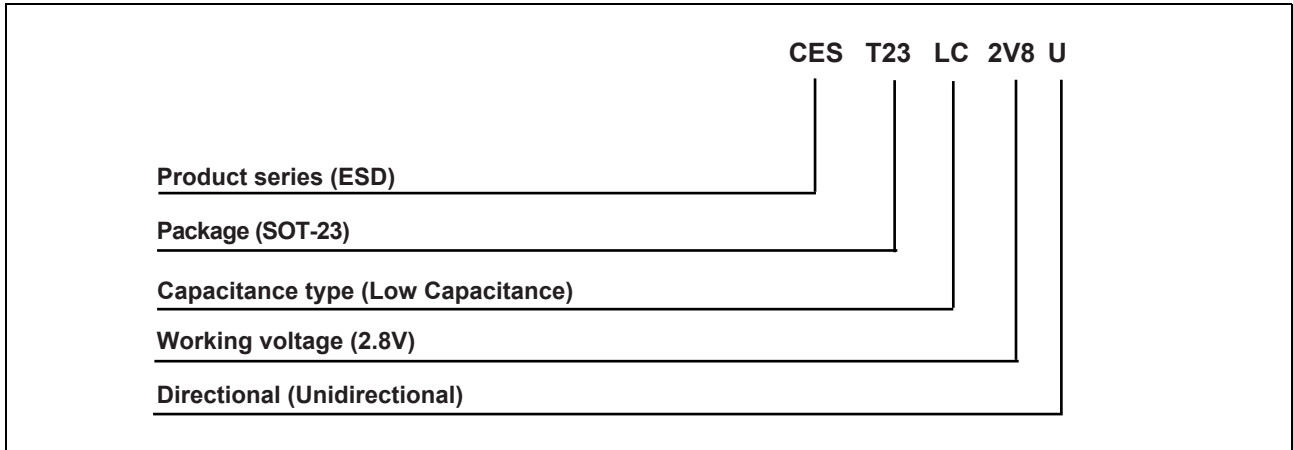

## Marking

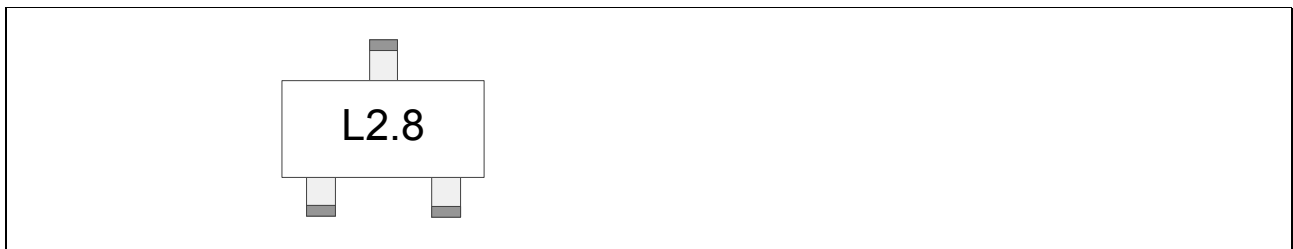

## Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
CEST23LC2V8U	SOT-23	Tape and reel	3000pcs / reel	EIA STD RS-481

## Revision history

Date	Revision	Changes
23-May-2012	1.0	Initial release

## **CAUTION / WARNING**

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.


Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

---

Specifications are subject to change without notice

© Copyright 2009, CREATEK Microelectronics

 CREATEK® is a registered trademark of CREATEK Microelectronics

All rights reserved